




HOHMANN & BARNARD, INC.
A MiTek - BERKSHIRE HATHAWAY COMPANY

Flashing and Reglets Enviro-Barrier™

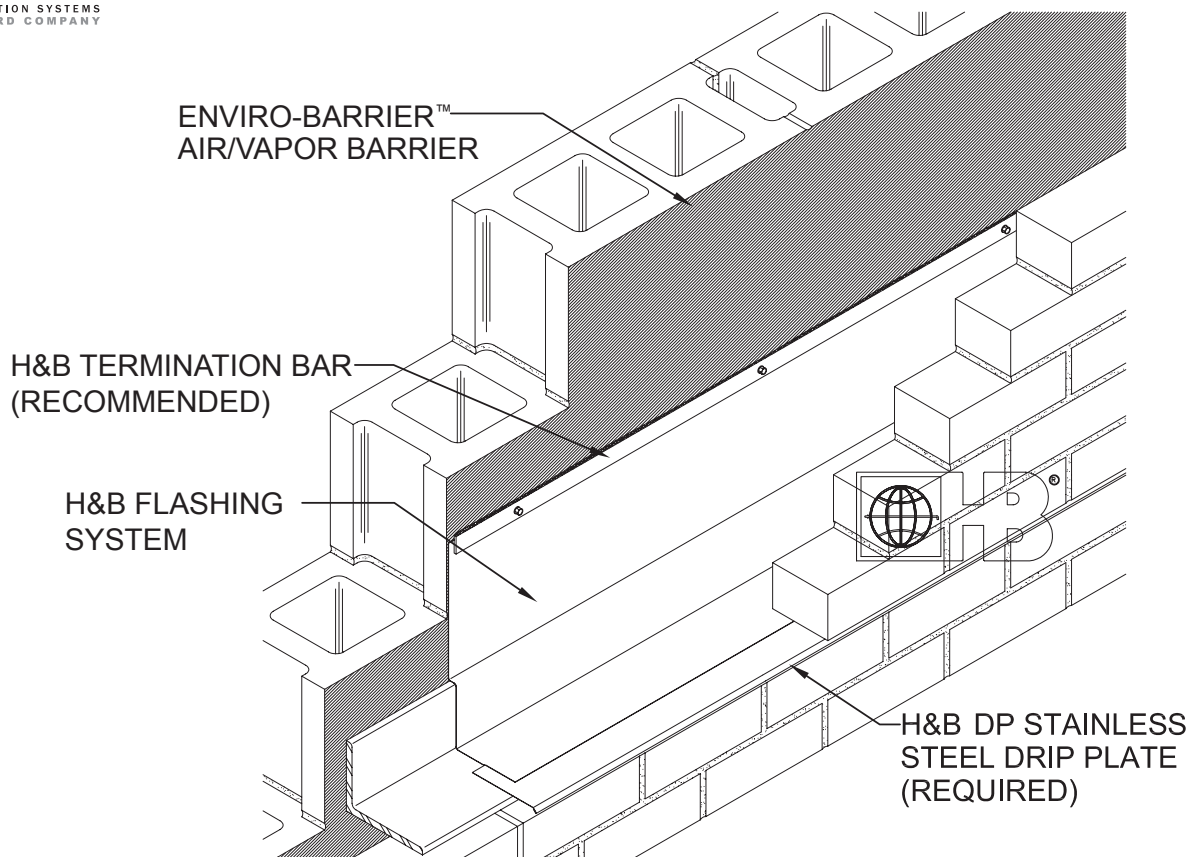

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

ENVIRO-BARRIER™ Air /Vapor Barrier

Single component, fluid applied, elastomeric membrane

Product Description:

- Elastomeric membrane for above grade wall assemblies.
- Asphalt free formulation.
- VOC-Free, HAP's-Free & Asbestos-Free.
- Remains flexible over a wide temperature range.
- Exceeds the highest industry standards for air barrier performance.
- Maintains excellent adhesion on most construction materials.
- Cost effective.

Basic Uses:

H&B's Enviro-Barrier™ features an asphalt-free formulation and maintains excellent adhesion on most construction materials including exterior gypsum board, CMU, concrete, stone, metal and much more.

Application:

Enviro-Barrier™ must be applied to a surface that is free from all foreign matter. This material should remain dry until it has cured. Enviro-Barrier™, can be brushed, rolled, or sprayed; and should only be applied to above grade wall assemblies. Visit h-b.com for detailed instructions.

Color:	Light Blue Curing to Blue
Coverage Rate:	25 sq. ft. (60 mils wet/40 mils dry) per gallon.
Solids by Weight:	65%
Weight Per Gallon:	10.2 pounds
UV Resistance:	Up to 120 Days
Application Temperature:	40° – 120° F
Recyclables By Weight:	30%
Dry Time:	
Tack Free:	2 – 4 hrs
Full Cure:	4 – 24 hrs
Testing:	ASTM E2178, ASTM E96, and ASTM E2357

- 5 Gallon Pail
- 55 Gallon Drum

HOHMANN & BARNARD, Inc.
30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
CANADA

© HOHMANN & BARNARD, INC. - 2012