




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

## Flashing and Reglets

# X-BARRIER™ Peel & Stick Barrier

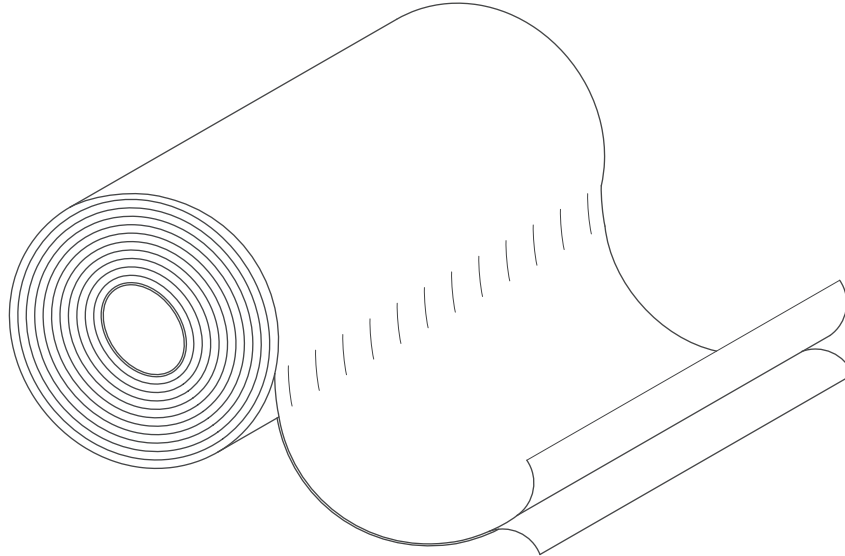

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**X-Barrier™** is a sheet applied self-adhesive, membrane to provide an air and water barrier when applied to above grade wall assemblies. X-Barrier is a self-adhered membrane that resists air leakage and water penetration and acts as a vapor barrier.

- Color: White
- Adhesive: High temperature non-asphalt
- Thickness: 40 mils
- UV Exposure: 180 days
- Recycled Content: 45%
- Application Temperature: Above 40°F
- Adhesive-backed with removable release liner

**Patents Pending**

**Storage and Protection:**

X-Barrier™ should be stored between 40°F (5°C) and 100°F (38°C). If exposed to lower temperatures, restore product to a minimum of 40° F (5° C) before application.

**Manufactured from 45% post-industrial and/or post-consumer recycled material.**

**Technical Data:**

- Tensile Strength - **ASTM D751-95**  
Machine Direction (Force) 130 lbs  
Cross Direction (Force) 124 lbs
- Trapezoidal Tear Strength - **ASTM D4533-91**  
Machine Direction (Force) 46 lbs  
Cross Direction (Force) 44 lbs
- Mullen Burst - **ASTM D751-95** 180 psi
- UV Exposure (2000 hours) - **ASTM G154-98** >90%
- Permeability  
MVTR - **ASTM E96 - B** <.075 Perms<sup>1</sup>  
Air permeability - **TAPPI-460** >5000 Sec/100cc

**DIMENSIONS:** 36" wide x 75' long

<sup>1</sup>Grains/h/ft<sup>2</sup>/in Hg (perms)