




HOHMANN & BARNARD, INC.
A MiTek - BERKSHIRE HATHAWAY COMPANY

Lox♦All® Adjustable Truss Reinforcement

165-2X Adjustable Truss

Adjustable Reinforcement with 2X-Hook

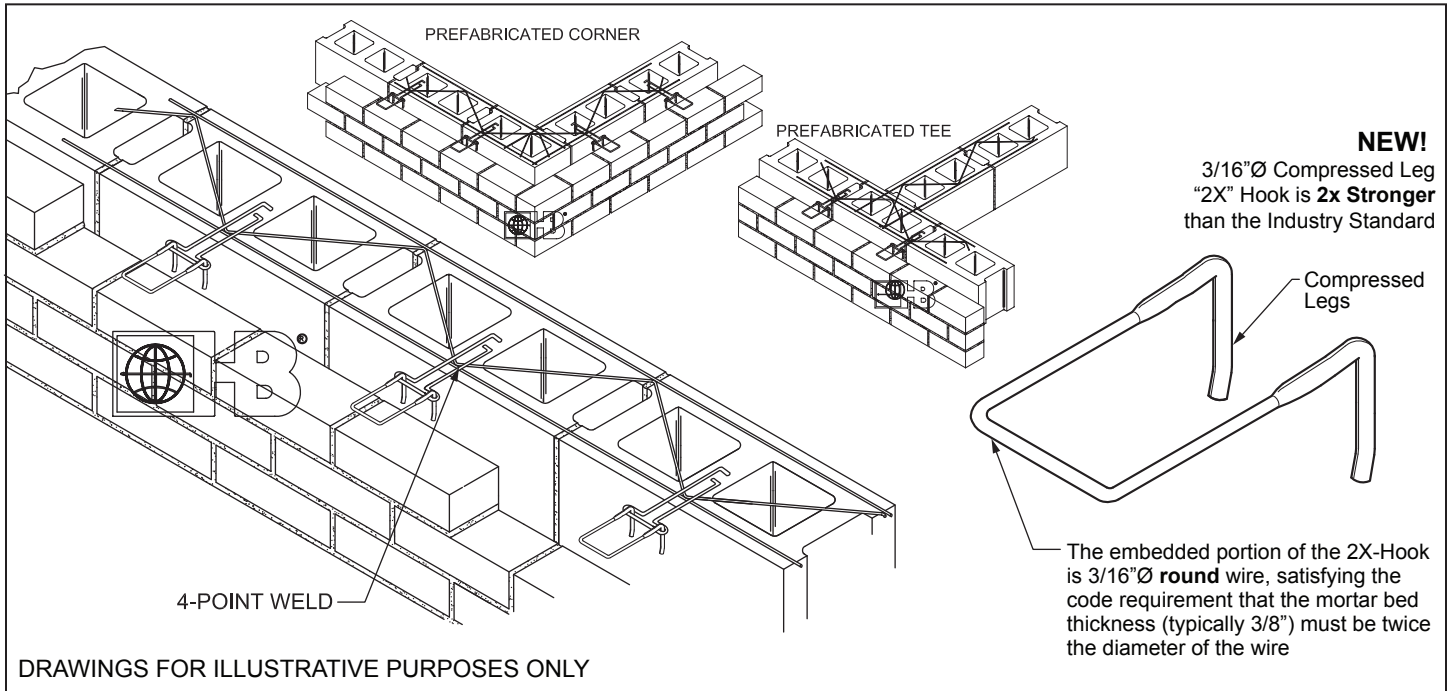

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Hohmann & Barnard's 2X-Hook has been tested and designed to withstand over 200-lbf, in tension or compression, at maximum allowed offset (ACI 530 6.2.2.5.5.4) of 1¼". These results exceed BIA recommendations and the capabilities of standard "round wire" hooks/pintles by over 100%, creating a higher standard for the masonry industry. *Test results available upon request.*
2X-Hook: U.S. Pat. No. 8,613,175

165 Lox-All® Truss Style Adjustable Joint Reinforcement has "winged loops" welded to the truss that accept pintles to allow vertical adjustability while restraining transverse movement of the two wythes.

MATERIAL CONFORMANCE

ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcement)

ACI / ASCE 530 (Building Code Requirements for Masonry Structures)

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A82/A82M**

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum
Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2** (1.5 oz/ft²)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Wire (Stainless Steel): **ASTM A580/ASTM 580M** - AISI Type 304 (Type 316 available on special order)

Wire Diameter:

9 gauge (.148" or W1.7) or 3/16"Ø (.187" or W2.8)

Side Rods and Cross Rods available in any combination of the above.
Cross Rods welded 16" O.C. Pintles and Loops are 3/16"Ø

H&B manufactures steel wire products from a minimum of 95% post-consumer recycled material.

165 Truss Finish:

Hot-Dip Galvanized | Stainless Steel Type 304 Type 316

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

165 Truss Size:

(S) Standard Weight:
9 Gauge Side Rods x 9 Gauge Cross Rods

(EH) Extra Heavy:
3/16"Ø Side Rods x 9 Gauge Cross Rods

(SHD) Super Heavy Duty:
3/16"Ø Side Rods x 3/16"Ø Cross Rods

Block Size: (Std. sizes: 4" - 16" wall, other widths available on special request.)

4" 6" 8" 10"

12" 14" 16"

Note: State cavity and/or insulation thickness when ordering.

Compressed Leg 2X-Hook Finish:

Hot-Dip Galvanized | Stainless Steel Type 304 Type 316

3/16"Ø Compressed Leg Hook: Length (Model), 3/16"Ø (5mm) wire

3" (300H-2X) 4" (400H-2X) 5" (500H-2X)

6" (600H-2X) 7" (700H-2X)

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS

T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations:

ALABAMA - ILLINOIS - MARYLAND

NEW YORK - PENNSYLVANIA - TEXAS

UTAH - CANADA

© HOHMANN & BARNARD, INC. - 2014